

SKEMA

Version

Remote under-roof motor 950
m³/h

Collection

Design+

EAN code

8034122360966



Photograph is for information purposes only
It may not correspond to the selected version.

FEATURES

- Perimeter suction
- Electronic control
- LED lighting
- Metallic grease filter, removable and washable
- Combined regenerable
- Carbon.Zeo filter (optional)
- Remote control included
- Dynamic Light (2700K - 5600K)
- Motor sold separately
- Tempered glass
- Dialogue system with auto mode

OPTIONAL ACCESSORIES

- KACL.396**
Flange - Ø200
- KACL.398**
Flange - Ø150
- KACL.770#41F**
Remote under-roof 1100 m3/h
Brushless
- KACL.782#49F**
Slim motor 800 m3/h
- KACL.786#41F**
Outdoor extractor fan 1000 m3/h
- KACL.789**
Junction for ceiling hoods
- KACL.796#4AF**
Outdoor extractor fan 1500 m3/h
- KACL.797#4AF**
Remote under-roof motor 1300 m3/h
- KACL.798#41F**
Remote under-roof motor 950 m3/h
- KACL.928**
Filters spare
- KACL.931**
Filters Carbon.Zeo - Spare
- KACL.939#BF**
Ceiling re-circulation filtering kit (only for Slim Motor)
- KACL.953#BF**
Carbon.Zeo vertical outlet ceiling filter unit kit

TECHNICAL FEATURES

- Installation type
Ceiling
- Dimensions
120 cm
- Finishing
Painted white steel
- Type of control
Electronic control
- Speed
3 + boost
- Lighting
All surface 43 W (2700-5600 K)
- Maximum distance
Gas hob: 150 cm
Electric hob: 150 cm

PACKAGING:WEIGHTS AND VOLUMES

- SKEMA Gross weight
30.2 kg
- Net weight
26.7 kg
- Volumes
0.18 m³
- Packaging size
Length
1420 mm
Height
190 mm
Depth
670 mm
- REMOTE MOTOR Remote under-roof motor 950 m³/h
- Gross weight
10 kg
- Net weight
9 kg
- Volumes
0.06 m³
- Packaging size
Length
435 mm
Height
340 mm
Depth
385 mm

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption
30 W
- Voltage
220-240V
- Frequency
50-60Hz
- Plug type
Shuko

MOTOR TECHNICAL SHEET

- Maximum capacity
830 m³/h
I.E.C. 61591
- Maximum noise level
68 dB(A)re1pW
I.E.C.60704-2-13
- Maximum pressure (Pa)
580 Pa
- Max. motor power
270 W
- ENERGY CLASS
B

SKEMA

Version


Remote under-roof motor 950
m³/h

Collection


Design+

EAN code

8034122360966



Hood and motor dimensions



Under-roof motor/onboard motor
outlets heading charts

SKEMA

Version
Remote under-roof motor 950
m³/h


Collection
Design+

EAN code
8034122360966

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	50	57	64	68
Capacity (m3/h) I.E.C.61591	360	480	630	830
Maximum pressure (Pa)	480	520	560	580
Power (W)	190	220	250	270
Air outlet	150	150	150	150

CAPACITY / PRESSURE

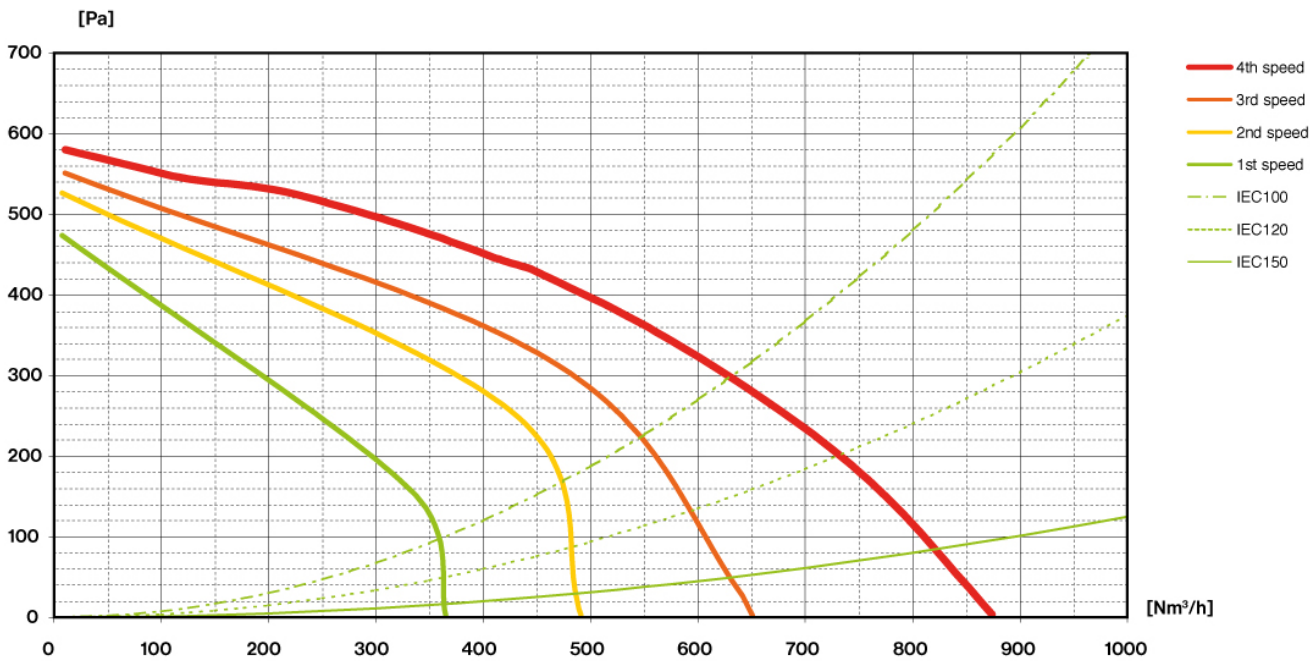


SKEMA

Version
Remote under-roof motor 950
m³/h

Collection
Design+

EAN code
8034122360966

ENERGY LABEL

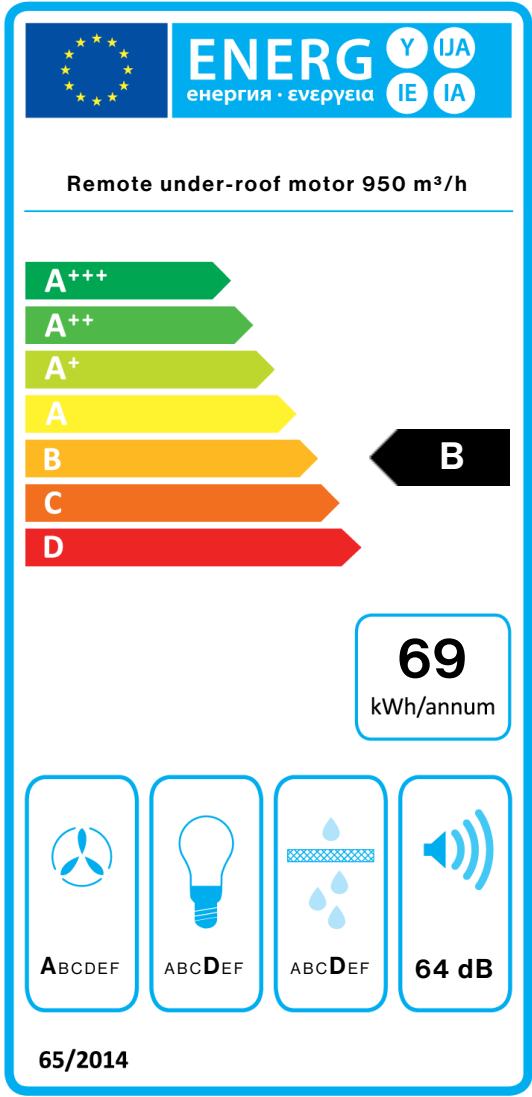

PF		
S	Falmec Spa	
M	Remote under-roof motor 950 m³/h	
AEC	69,0	kWh/a
EEC	B	
FDE	29,5	
FDEC	A	
LE	22,9	
LEC	D	
GFE	65,1	
GFEC	D	
Qmin	360,0	m³/h
Qmax	630,0	m³/h
Qboost	830,0	m³/h
SPEmin	50	dBa
SPEmax	64	dBa
SPEboost	58	dBa
PO	-	W
PS	0,48	W
PI		
F	0.9	
EEL	56,7	
Qbep	441,0	m³/h
Pbep	434	Pa
Qboost	830,0	m³/h
Wbep	180,0	W
WL	13,50	W
Emiddle	309	lux
Lwa-SPEmax	64	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.