


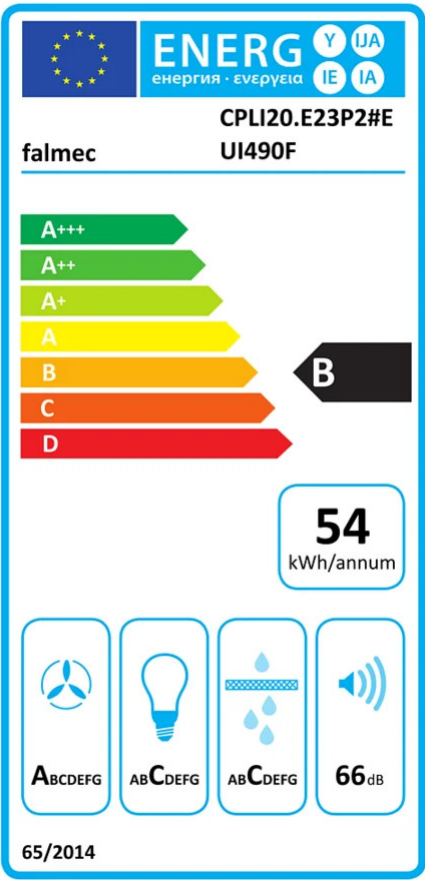

PF		
S	Falmec Lab	
M	Plus - Island - 120 cm - Inox - 800 m3/h	
AEC	54.4	kWh/a
EEC	B	
FDE	29.2	
FDEC	A	
LE	16.6	
LEC	C	
GFE	80	
GFEC	C	
Qmin	313	m³ /h
Qmax	573	m³ /h
Qboost	641	m³ /h
SPEmin	51	dBa
SPEmax	66	dBa
SPEboost	69	dBa
PO	0	W
PS	0.48	W
PI		
F	0.9	
EEL	56.9	
Qbep	366	m³ /h
Pbep	373	Pa
Qboost	641	m³ /h
Wbep	130	W
WL	16	W
Emiddle	266	lux
Lwa-SPEmax	66	dBa

PF_Scheda prodotto conforme a 65/2014 S_Vendor name / M_Project identification / AEC_Yearly energy consumption (AEC) hood / EEC_Energy efficiency class / FDE_Fluid dynamic efficiency (FDE) hood / FDEC_Fluid dynamic efficiency class / LE_Light efficiency (LE) hood / LEC_Light efficiency class of luminous efficiency / GFE_Fat filtration efficiency / GFEC_Fat filtration efficiency class / Qmin_Airflow (in m³/h) at minimum power under normal use conditions / Qmax_Airflow (in m³/h) at maximum power under normal use conditions / Qboost_Airflow (in m³/h) at the intensive power / SPEmin_A-weighted sound power of airborne noise emissions at the minimum power under normal use conditions / SPEmax_A-weighted sound power of airborne noise emissions at the maximum power under normal use conditions / SPEboost_A-weighted sound power of airborne noise emissions under intensive or boost use conditions / P0_CPower consumption in off mode (Po) / Ps_CPower consumption in standby mode (Ps).

PI_Additional information in accordance with 66/2014 4 F_Factor of increase over time / EEL_Energy Efficiency Index / Qbep_Airflow speed measured at best efficiency point / Pbep_Air pressure measured at best efficiency point / Qboost_Full airflow / Wbep_Energy input measured at best efficiency point / WL_Nominal power of lighting system / Emiddle_Average illumination of lighting system on cooking surface / Lwa=SPEmax_Loise pressure level at maximum power