

Version	Extracting hood body - Wall - 120 cm - Black
Design	Falmec Lab
Collection	Elements

TECHNICAL FEATURES

Materials/Finishes	Matt black painted steel
Materials/Finishes	Black anodised aluminium front panel
Technology	No-Drop System anti-condensation technology
Features	Extractable tempered glass flap with integrated control Emptyable liquid collector Modular system
Control	Touch control
Function	Extracting/Filtering
Lighting	Dynamic Light (2700K - 5600K) Strip LED - 2700 K / 5600 K
Filters	Anti-condensation no-drop filter in technopolymer
Motor	Motor sold separately
Dimensions	120 cm



Photograph is for information purposes only. May not correspond to the selected version

CONNECTION AND CONSUMPTION FUNCTIONS


Maximum consumption	20 W
Voltage/Frequency	220-240V 50-60Hz

MOTOR


Motor	Remote under-roof motor 950 m3/h
Maximum capacity	684 m³/h I.E.C.61591
Maximum sound level	62 dB (A)re1pW I.E.C. 60704-2-13
Energy class	B

WEIGHTS AND VOLUMES


Gross weight	26.8 kg
Net weight	23.1 kg
Volume	0.19 m3
Packaging dimensions	L 1295 x H 322 x P 465 mm




Tablet holder (included in the hood module)




Module 60 cm




Module 90 cm




Plant basin for shelf 60 cm




Plant basin for shelf 90 cm

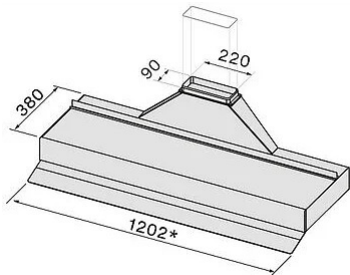

Hood module 120 cm



Side view with front panel in aluminium




Side view without front panel (customisable version)

Optional accessories

Code	Description
KACL.798#41F	Remote under-roof motor 950 m3/h
KACL.770#41F	Remote under-roof 1100 m3/h Brushless
KACL.786#41F	Outdoor extractor fan 1000 m3/h
KACL.1029#HF	Kit end covers
KACL.459#3F	Plant basin Shelf 60 cm
KACL.458#3F	Plant basin Shelf 90 cm

FLOW RATE / PRESSURE

REMOTE UNDER-ROOF MOTOR 950 M3/H

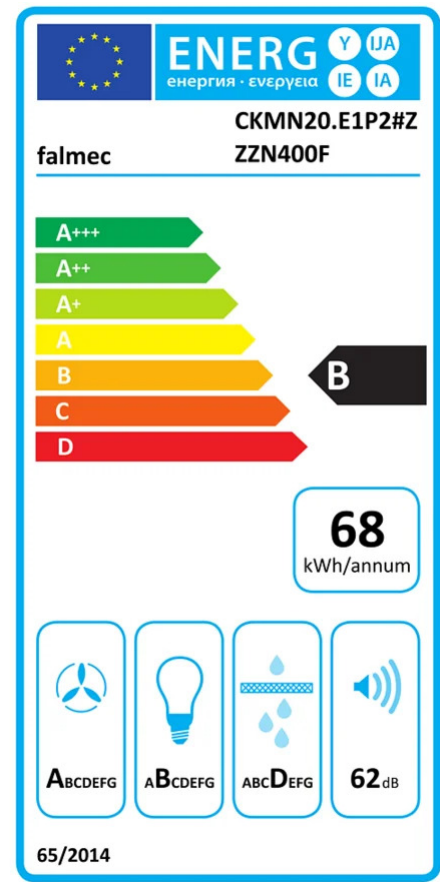

PF		
S	Falmec Lab	
M	Remote under-roof motor 950 m3/h	
AEC	67.5	kWh/a
EEC	B	
FDE	28.4	
FDEC	A	
LE	23.5	
LEC	B	
GFE	70	
GFEC	D	
Qmin	340	m³ /h
Qmax	542	m³ /h
Qboost	684	m³ /h
SPEmin	49	dBa
SPEmax	62	dBa
SPEboost	65	dBa
PO	0	W
PS	0.48	W

PI		
F	1	
EEL	61.1	
Qbep	377	m³ /h
Pbep	436	Pa
Qboost	684	m³ /h
Wbep	161	W
WL	12	W
Emiddle	282	lux
Lwa-SPEmax	62	dBa

PF_Scheda prodotto conforme a 65/2014 S_Vendor name / M_Project identification / AEC_Yearly energy consumption (AEC) hood / EEC_Energy efficiency class / FDE_Fluid dynamic efficiency (FDE) hood / FDEC_Fluid dynamic efficiency class / LE_Light efficiency (LE) hood / LEC_Light efficiency class of luminous efficiency / GFE_Fat filtration efficiency / GFEC_Fat filtration efficiency class / Qmin_Airflow (in m³/h) at minimum power under normal use conditions / Qmax_Airflow (in m³/h) at maximum power under normal use conditions / Qboost_Airflow (in m³/h) at the intensive power / SPEmin_A-weighted sound power of airborne noise emissions at the minimum power under normal use conditions / SPEmax_A-weighted sound power of airborne noise emissions at the maximum power under normal use conditions / SPEboost_A-weighted sound power of airborne noise emissions under intensive or boost use conditions / P0_CPower consumption in off mode (Po) / Ps_CPower consumption in standby mode (Ps).

PI_Additional information in accordance with 66/2014 4 F_Factor of increase over time / EEL_Energy Efficiency Index / Qbep_Airflow speed measured at best efficiency point / Pbep_Air pressure measured at best efficiency point / Qboost_Full airflow / Wbep_Energy input measured at best efficiency point / WL_Nominal power of lighting system / Emiddle_Average illumination of lighting system on cooking surface / Lwa=SPEmax_Loise pressure level at maximum power