


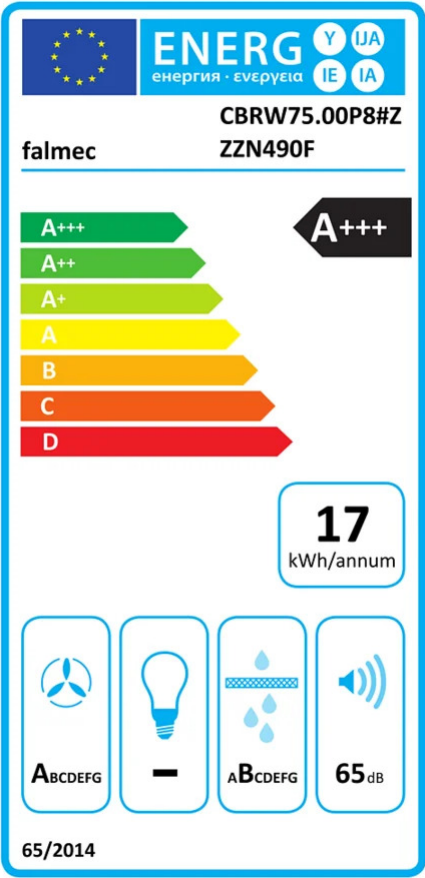

PF		
S	Falmecc Lab	
M	Worktop - 75 cm - Black - 800 m3/h	
AEC	0	kWh/a
EEC	A+++	
FDE	0	
LE	0	
GFE	0	
Qmin	0	m ³ /h
Qmax	0	m ³ /h
Qboost	690	m ³ /h
SPEmin	44	dBa
SPEmax	65	dBa
SPEboost	0	dBa
PO	0	W
PS	0	W
PI		
F	0	
EEL	0	
Qbep	0	m ³ /h
Pbep	0	Pa
Qboost	690	m ³ /h
Wbep	0	W

PF_Scheda prodotto conforme a 65/2014 S_Vendor name / M_Project identification / AEC_Yearly energy consumption (AEC) hood / EEC_Energy efficiency class / FDE_Fluid dynamic efficiency (FDE) hood / FDEC_Fluid dynamic efficiency class / LE_Light efficiency (LE) hood / LEC_Light efficiency class of luminous efficiency / GFE_Fat filtration efficiency / GFEC_Fat filtration efficiency class / Qmin_Airflow (in m³/h) at minimum power under normal use conditions / Qmax_Airflow (in m³/h) at maximum power under normal use conditions / Qboost_Airflow (in m³/h) at the intensive power / SPEmin_A-weighted sound power of airborne noise emissions at the minimum power under normal use conditions / SPEmax_A-weighted sound power of airborne noise emissions at the maximum power under normal use conditions / SPEboost_A-weighted sound power of airborne noise emissions under intensive or boost use conditions / P0_CPower consumption in off mode (Po) / Ps_CPower consumption in standby mode (Ps).

PI_Additional information in accordance with 66/2014 4 F_Fattore di incremento nel tempo / EEL_Indice di efficienza energetica / Qbep_Velocità del flusso d'aria misurato nel punto di efficienza migliore / Pbep_Pressione dell'aria misurata nel punto di efficienza migliore / Qboost_Flusso d'aria massimo / Wbep_Ingresso energia elettrica misurato nel punto di efficienza migliore / WL_Potenza nominale del sistema luminoso / Emiddle_Illuminazione media del sistema luminoso sulla superficie di cottura / Lwa=SPEmax_Livello di pressione sonora alla potenza massima.