

QUASAR

Version
Wall - 90 cm - Black - 800 m3/h

Designer

Collection
Design


EAN code
8034122354033

FEATURES

- Perimeter suction
- Touch control + 24 h function
- Metallic grease filter, removable and washable
- Combined regenerable
- Carbon.Zeo filter (optional)
- Charcoal filter
- Possible to duct wall mounted from rear
- Optional Chimney
- Dynamic Light (2700K - 5600K)


OPTIONAL ACCESSORIES

- KACL.815**
Protective cleaning cloths for stainless steel (box 10 pcs)
- KACL.865**
Air flow conveyor for re-circulation version (Wall)
- KACL.941**
External Carbon.Zeo filter unit for sloped hoods
- KACL.958#NF**
External Carbon.Zeo filter unit for sloped hoods (Black)
- KCQAN.00#I**
Chimney - Inox
- KCQAN.00#N**
Optional chimney - Black



TECHNICAL FEATURES

- Installation type
Wall
- Dimensions
90 cm
- Finishing
Black tempered glass finishing
- Motor
800 m³/h
- Type of control
Touch control
- Speed
3 + boost
- Lighting
Led 3x1,2 W - 2700 K / 5600 K
- Filter
2 x Metallic filter "Base" - 290x326 mm
- Charcoal filter
Round charcoal filter Ø170 mm - Type 6 (optional)
- Minimum distance
Gas hob: 57 cm
Electric hob: 52 cm



Photograph is for information purposes only
It may not correspond to the selected version.

PACKAGING:WEIGHTS AND VOLUMES

- Gross weight
39 kg
- Net weight
33 kg
- Volumes
0.42 m³
- Packaging size
Length
1035 mm
Height
560 mm
Depth
740 mm

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption
280 W
- Voltage
220-240V
- Frequency
50-60Hz
- Plug type
Shuko

MOTOR TECHNICAL SHEET

- Maximum capacity
750 m³/h
I.E.C. 61591
- Maximum noise level
66 dB(A)re1pW
I.E.C.60704-2-13
- Maximum pressure (Pa)
510 Pa
- Max. motor power
224 W
- ENERGY CLASS
A

QUASAR

Version
Wall - 90 cm - Black - 800 m3/h

Designer


Collection
Design

EAN code
8034122354033

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	46	53	58	66
Capacity (m3/h) I.E.C.61591	295	390	500	750
Maximum pressure (Pa)	390	440	490	510
Power (W)	130	150	178	224
Air outlet	150	150	150	150

CAPACITY / PRESSURE
[Pa]

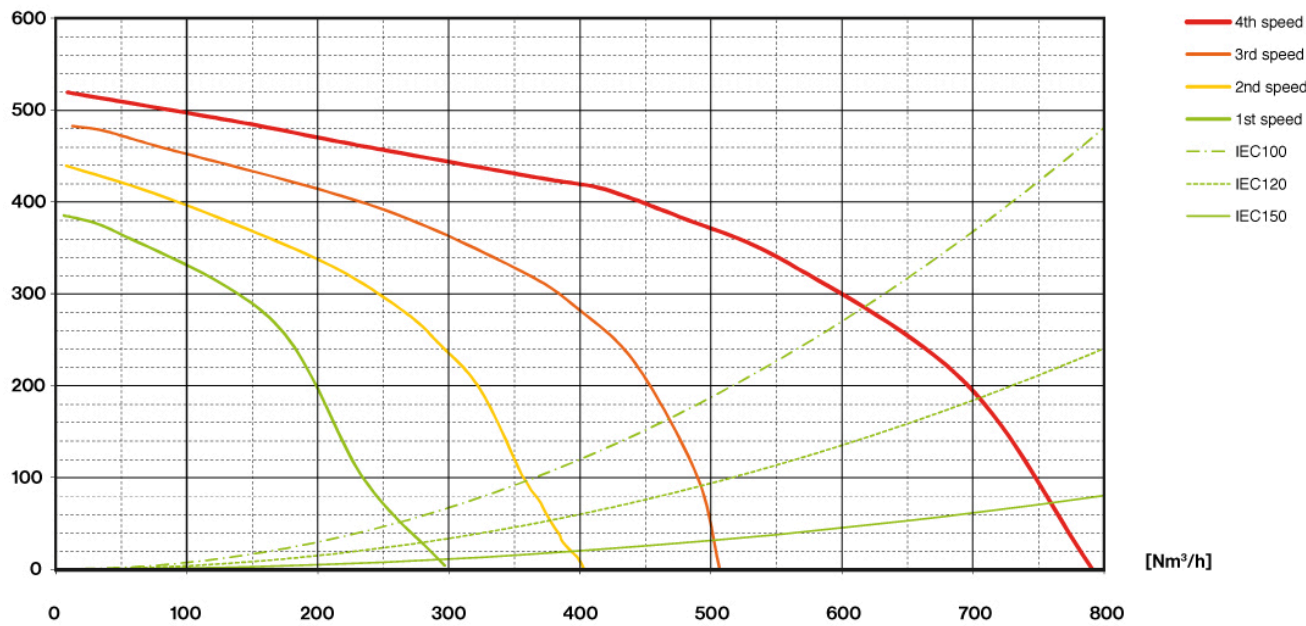

QUASAR


Version
Wall - 90 cm - Black - 800 m3/h

Designer

Collection
Design

EAN code
8034122354033

ENERGY LABEL

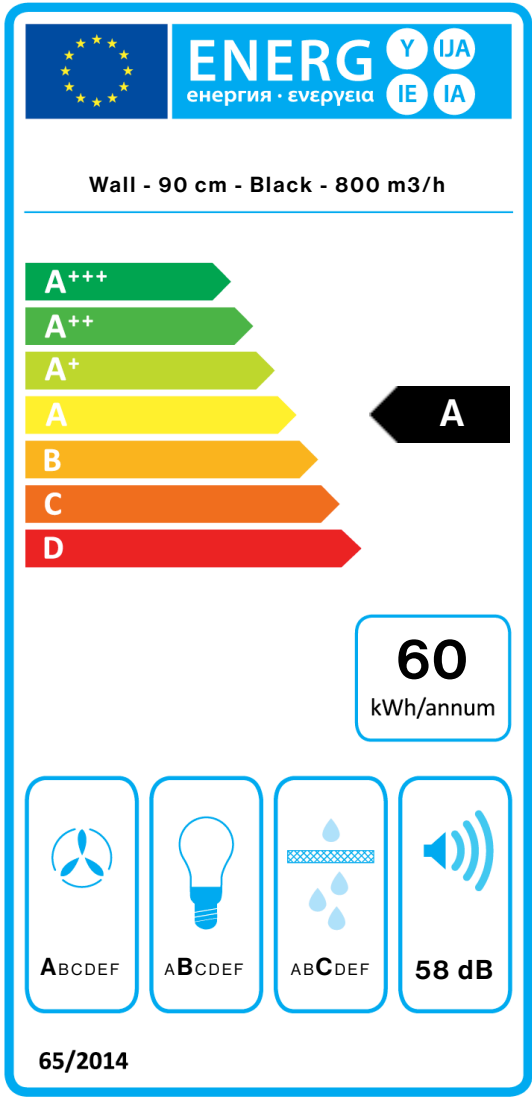

PF		
S	Falmec Spa	
M	Wall - 90 cm - Black - 800 m3/h	
AEC	59,5	kWh/a
EEC	A	
FDE	29,4	
FDEC	A	
LE	20,7	
LEC	B	
GFE	76,0	
GFEC	C	
Qmin	295,0	m³/h
Qmax	500,0	m³/h
Qboost	750,0	m³/h
SPEmin	46	dBa
SPEmax	58	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	0.9	
EEl	54,2	
Qbep	430,0	m³/h
Pbep	404	Pa
Qboost	750,0	m³/h
Wbep	164,0	W
WL	6,50	W
Emiddle	134	lux
Lwa-SPEmax	58	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airbone acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). PI_Additional information according to 66/2014 F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.