



Installation


1. Place the appliance in front of the installation recess.
2. Apply cover strips above, between and below the securing plates on the side walls of the appliance.
Cut the cover strips to the right length for this purpose.

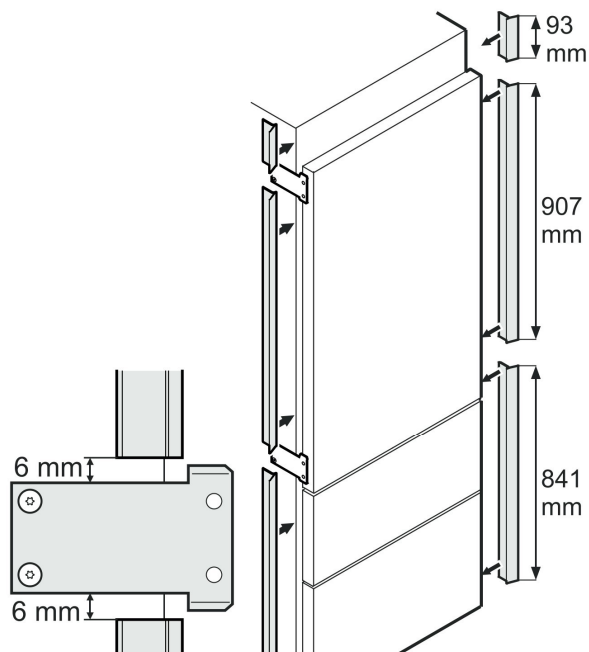

Apply the cover strips 6 mm from the securing plates.

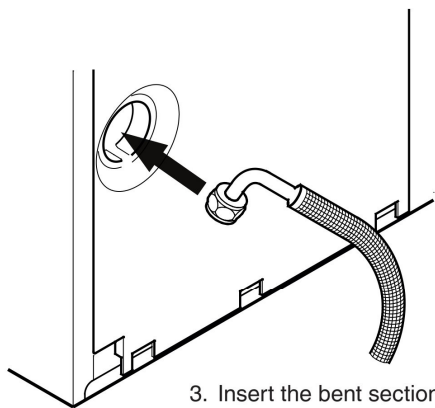

3. Insert the bent section of the hose through the opening at the rear of the appliance.

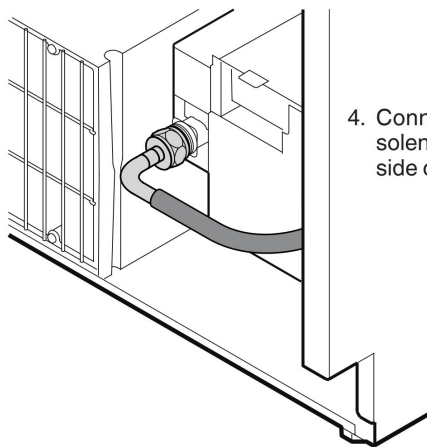

4. Connect the hose to the solenoid valve at the front side of the appliance.

5. Route the mains cable towards the socket.
6. Route the water hose towards the water shut-off valve.




WARNING!

Do not connect the appliance to the power supply until the installation is completed.



CAUTION!

Lay the mains cable and the water hose in such a way that they will not be damaged when the appliance is slid into the installation recess.

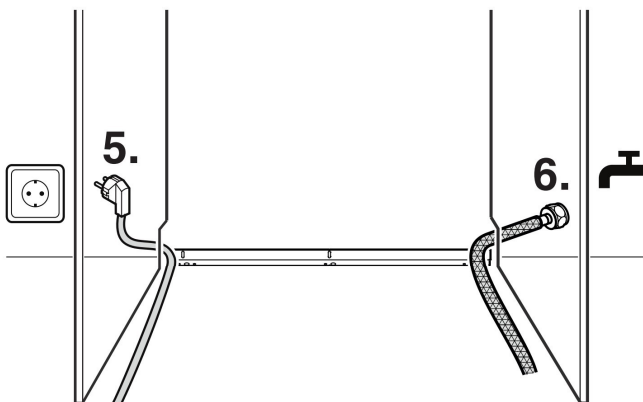


7. Push the appliance slowly into the recess until the compressor mounting plate touches the anti-tipping bracket.



WARNING!

To prevent the appliance from tipping forwards, the compressor mounting plate must be touching the anti-tipping bracket!

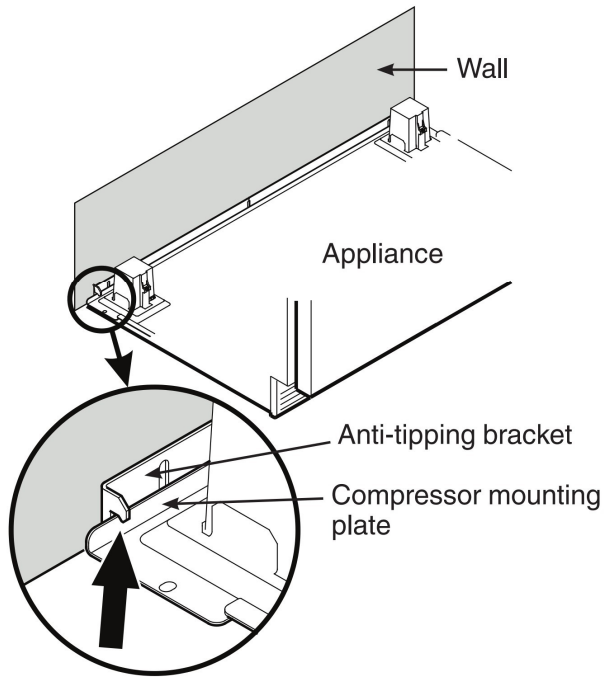


8. Connect the hose to the shut-off tap.
Open the shut-off tap and check the system for leakage.

Important!


After the ice maker has been switched on, the water supply system must be bled. See the section Bleeding the ice maker in the operating instructions.

Levelling the appliance

1. Adjust the height of the appliance at the front by twisting the adjustable feet (1) (A/F 27). Use the open-ended spanner provided.

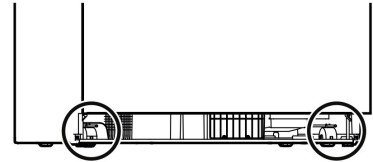


Caution!
The front feet of the appliance must be firmly placed on the floor.

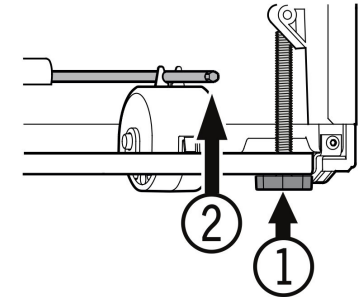


2. Adjust the height of the appliance at the rear by turning the adjusting bars (2).

Turn the adjusting bars clockwise until the compressor mounting plate touches the anti-tipping bracket.

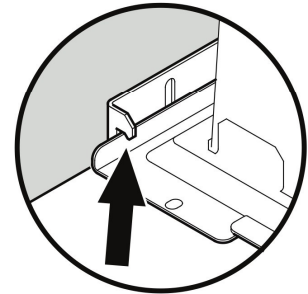


Fastening the appliance in the recess

Once in the recess, secure the appliance to the body of the unit using the securing plates (4 x 16 screws). Then click the covers supplied into place.

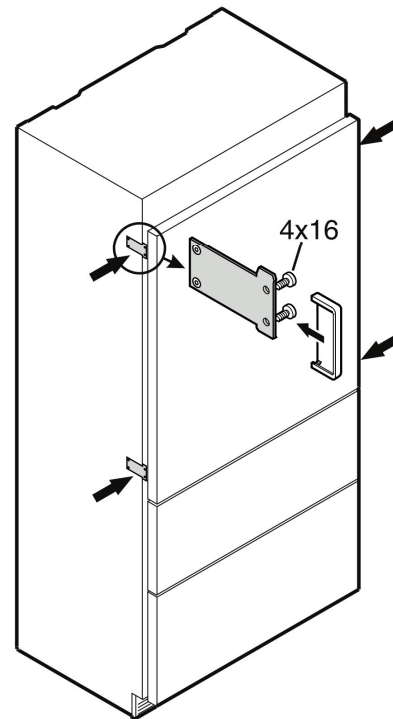

Adjusting the refrigerator door

The lateral tilt of the refrigerator door can be adjusted if required. Undo screws (1). Adjust the lateral tilt using the grub screw (2) (Allen key A/F 2.5).

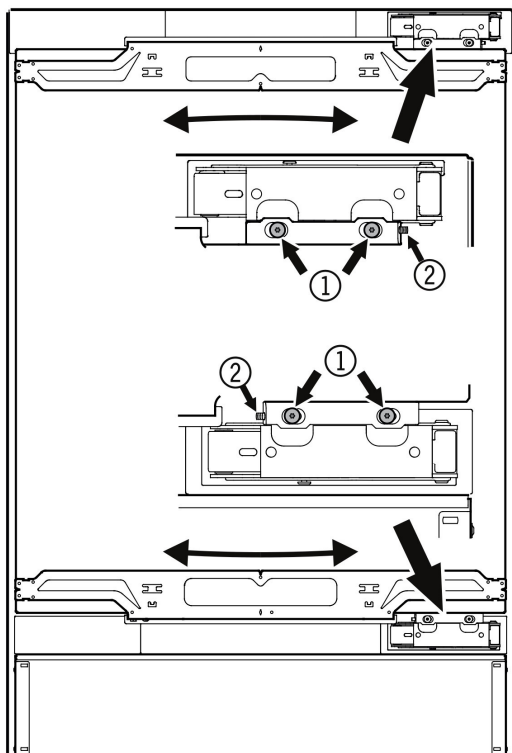


Before fitting the door panels

Remove the cover (1) and unscrew the top and bottom attachment brackets (2) from the refrigerator door. These attachment brackets will be mounted onto the refrigerator door panel.

Important!

The securing nuts are needed for re-mounting the pre-assembled door panel onto the refrigerator door.

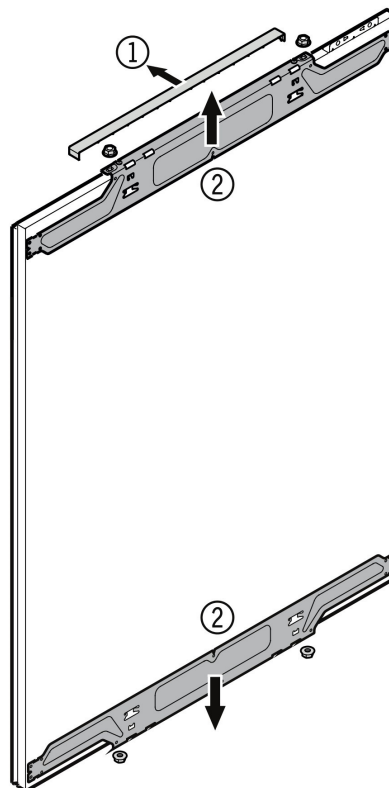


Adjusting the front of the drawer

If required, the front of the freezer drawers can be adjusted.

Transfer the screws shown in the illustration (on the left and right sides of the freezer drawer) individually to the long slots below.


Tighten the screws in the front of the drawer once it is in the right position.

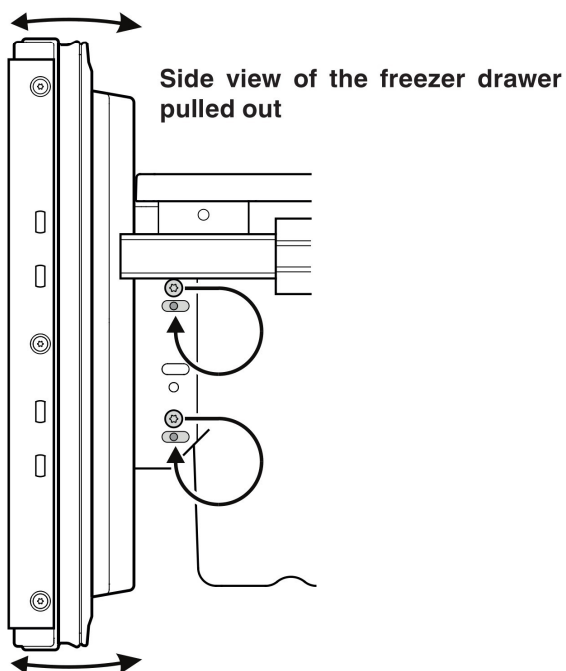

Unscrew the attachment brackets (3) from the freezer drawers. These attachment brackets will be mounted onto the freezer panels.

Important!

The screws are needed for re-mounting the pre-assembled freezer panels onto the freezer drawers.

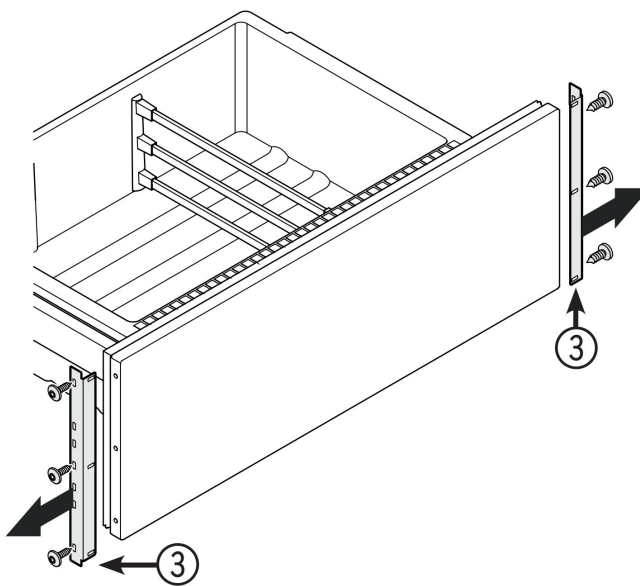

Mounting the attachment brackets onto the door panels

1. Draw a line 1041 mm from the bottom side of the door panel.
2. Draw a further line 107.5 mm from the bottom side of the door panel.
3. Align one of the refrigerator door attachment brackets to the top line, as shown in the illustration below, and secure with at least 6 4 x 14 screws.
4. Align the second refrigerator door attachment bracket to the bottom line, as shown in the illustration below, and secure with at least 6 4 x 14 screws.
5. Secure each of the attachment brackets that have been removed from the freezer drawers using 3 4 x 14 screws, as shown in the illustration below.

