

GRUPPO INCASSO

Version
Built-in 50 cm - 600 m3/h

Collection
Design

EAN code
8034122353388



The photograph is purely for information
It may not correspond to the selected version.


FEATURES

- Scotch brite stainless steel (AISI 304)
- Perimeter suction
- Electronic control
- Metallic grease filter, removable and washable
- Charcoal filter
- Remote control (optional)
- Dimmable lighting
- Dynamic Light (2700K - 5600K)

Charcoal filter type 6 code 103050091 from 11.15.21.
Charcoal filter type 2 code 103050102 until 11.15.21.
Dimmable led lighting since 05.03.23

OPTIONAL ACCESSORIES

- 103050091**
Round charcoal filter Ø170 mm - Type 6
- 103050102**
Round charcoal filter Ø212 mm - Type 2
- 105080053**
Remote control
- KACL.815**
Protective cleaning cloths for stainless steel (box 10 pcs)



TECHNICAL FEATURES

- Installation type**
Built-in
- Dimensions**
50 cm
- Finishing**
Scotch brite stainless steel (AISI 304)
- Motor**
600 m³/h
- Type of control**
Electronic control
- Speed**
3
- Lighting**
Led 2x1,2 W - 2700 K / 5600 K
- Filter**
2 x Metallic filter "Base" - 204x207 mm (spare part)
- Minimum distance**
Gas hob: 62 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

- Gross weight**
10 kg
- Net weight**
7.6 kg
- Volumes**
0.09 m³
- Packaging size**
Length 635 mm
Height 380 mm
Depth 390 mm

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption**
230 W
- Voltage**
220-240V
- Frequency**
50-60Hz
- Plug type**
Shuko

MOTOR TECHNICAL SHEET

- Maximum capacity**
480 m³/h
I.E.C. 61591
- Maximum noise level**
65 dB(A)re1pW
I.E.C.60704-2-13
- Maximum pressure (Pa)**
500 Pa
- Max. motor power**
180 W
- ENERGY CLASS**
C

GRUPPO INCASSO

Version
Built-in 50 cm - 600 m3/h


Collection
Design

EAN code
8034122353388

MOTOR TECHNICAL SHEET

Motor speed	1	2	3
Noise level dB(A)re1pW-I.E.C.60704-2-13	49	58	65
Capacity (m3/h) I.E.C.61591	220	320	480
Maximum pressure (Pa)	270	400	500
Power (W)	100	130	180
Air outlet	120	120	120

CAPACITY / PRESSURE

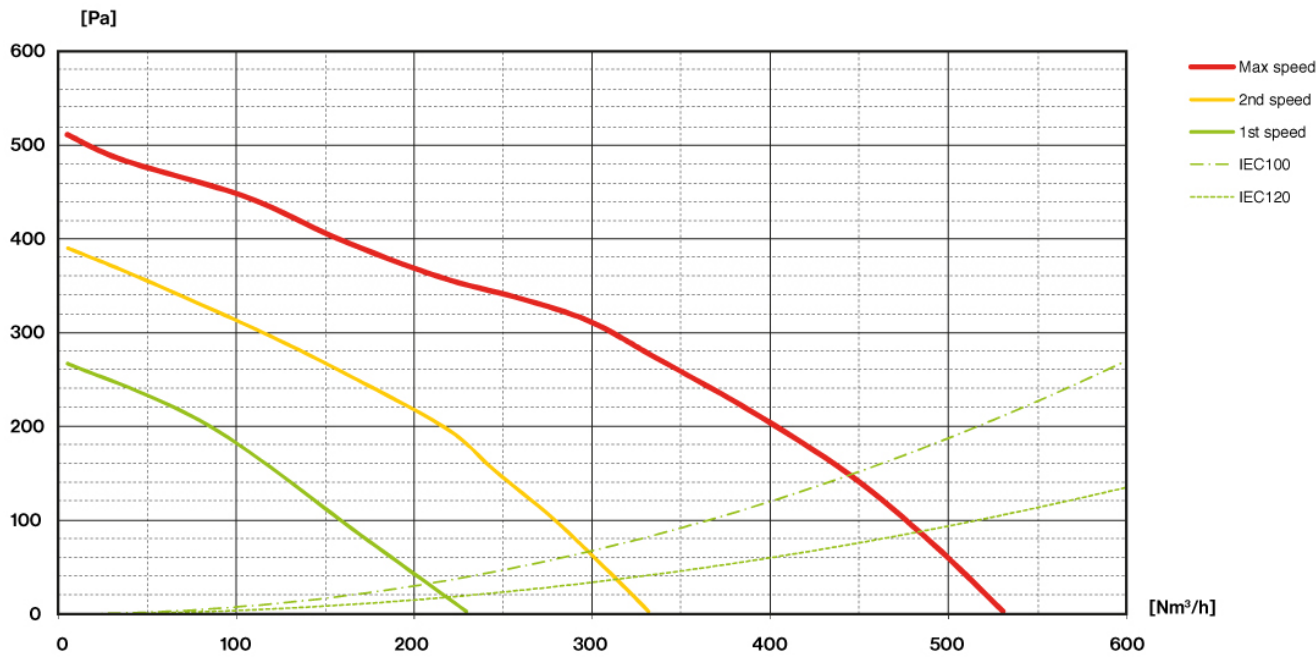


GRUPPO INCASSO

Version
Built-in 50 cm - 600 m3/h

Collection
Design

EAN code
8034122353388

ENERGY LABEL

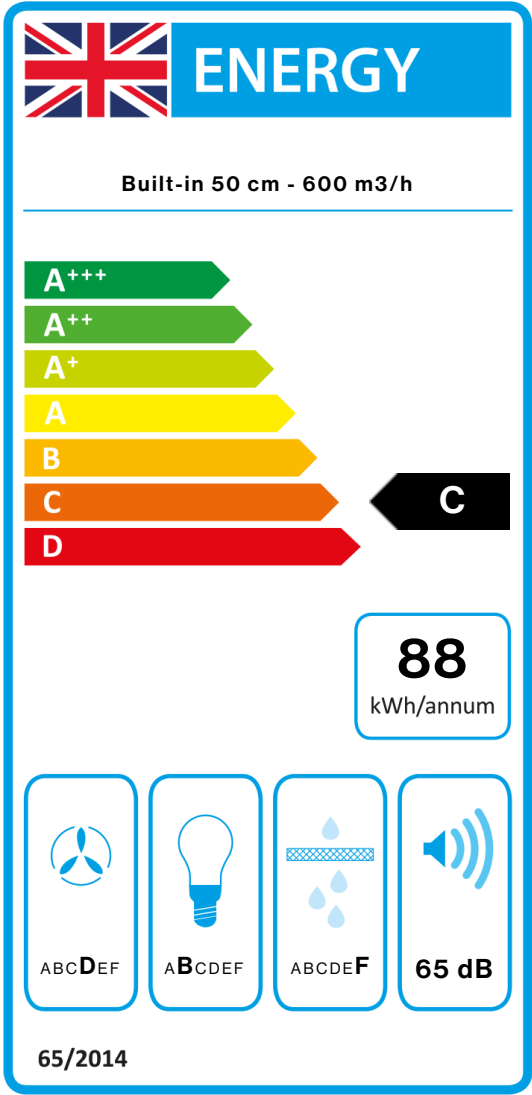

PF		
S	Falmec Spa	
M	Built-in 50 cm - 600 m3/h	
AEC	87,7	kWh/a
EEC	C	
FDE	15,8	
FDEC	D	
LE	20,5	
LEC	B	
GFE	53,0	
GFEC	F	
Qmin	220,0	m³/h
Qmax	480,0	m³/h
Qboost	480,0	m³/h
SPEmin	49	dBa
SPEmax	65	dBa
SPEboost	-	dBa
PO	-	W
PS	0,48	W
PI		
F	1.4	
EEl	80,9	
Qbep	303,0	m³/h
Pbep	308	Pa
Qboost	480,0	m³/h
Wbep	164,0	W
WL	5,30	W
Emiddle	109	lux
Lwa-SPEmax	65	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airbone acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.