

Version Wall - 55 cm - Satin Black - 800 m³/h

Collection Design

TECHNICAL FEATURES

Materials/Finishes Painted black steel

Materials/Finishes Black glass satin finishing

Materials/Finishes Tempered white glass with Stainless Steel central band

Features Opening frontal

Control Electronic control

Function Extracting/Filtering

Chimney Possible to duct wall mounted from rear
Optional chimney

Lighting Dimmable lighting
Dynamic Light (2700K - 5600K)
LED 2x1,2 W - 2700 K / 5600 K

Filters Metallic grease filter, removable and washable
Combined regenerable Carbon.Zeo filter (optional)
Charcoal filter

Dimensions 55 cm

Minimum Electric hob distance 52 cm

Minimum Gas hob distance 52 cm

Notes Dynamic and dimmable Led light from 03.04.24

CONNECTION AND CONSUMPTION FUNCTIONS

Maximum consumption 280 W

Voltage/Frequency 220-240V 50-60Hz

Plug Shuko

MOTOR

Motor 800 m³/h

Maximum capacity 750 m³/h I.E.C.61591

Maximum sound level 58 dB (A)re1pW I.E.C. 60704-2-13

Energy class A

WEIGHTS AND VOLUMES

Gross weight 22 kg


Net weight 17 kg

Volume 0.25 m³

Packaging dimensions L 775 x H 452 x P 705 mm



Photograph is for information purposes only. May not correspond to the selected version

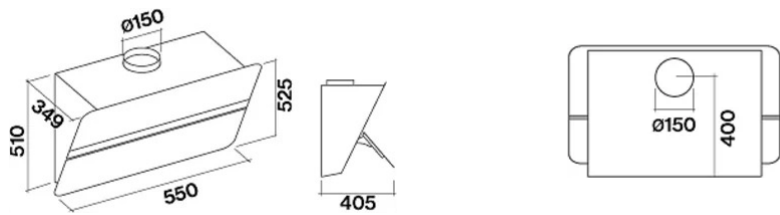


Optional accessories


Code	Description
KACL.958#NF	External Carbon.Zeo filter unit for sloped hoods (Black)
KCQAN.00#I	Chimney - Inox
KCQAN.00#N	Chimney - Black
KACL.1059	Conveyer for air outlet (Ø150)

ENGINE SPECIFICATIONS

Motor speed	1	2	3	4
Noise dB(A) re1pW I.E.C. 60704-2-13	46	53	58	66
Capacity	295	390	500	750
Maximum pressure (Pa)	390	440	490	510
Motor power (W)	130	150	178	224
Air outlet	150	150	150	150

FLOW RATE / PRESSURE

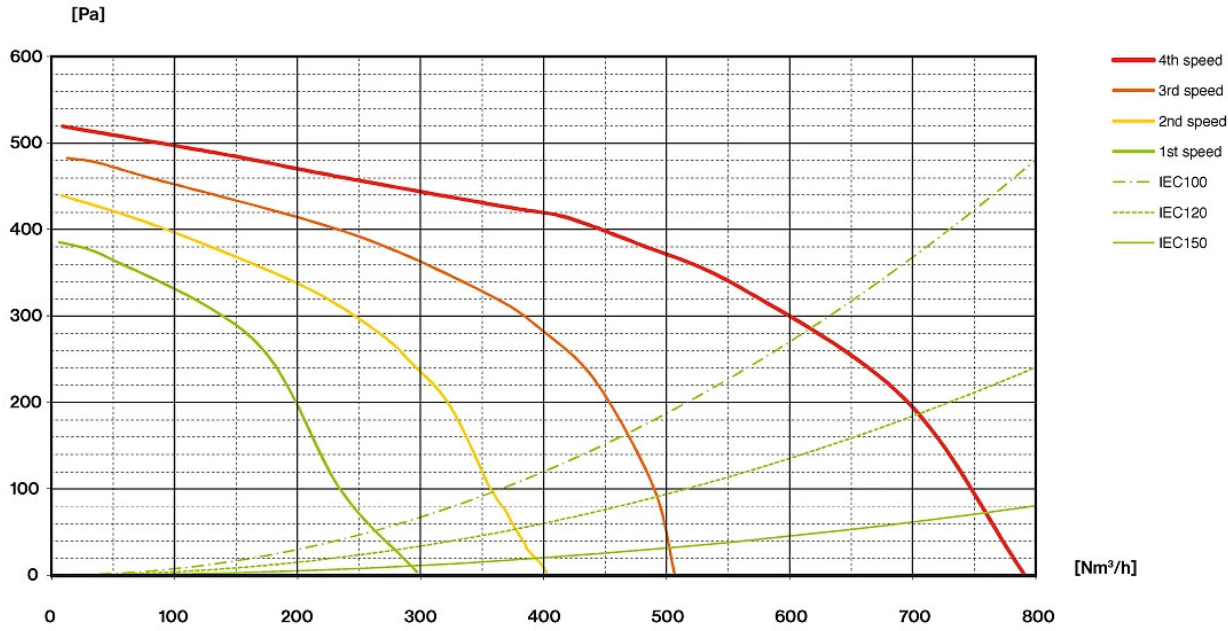

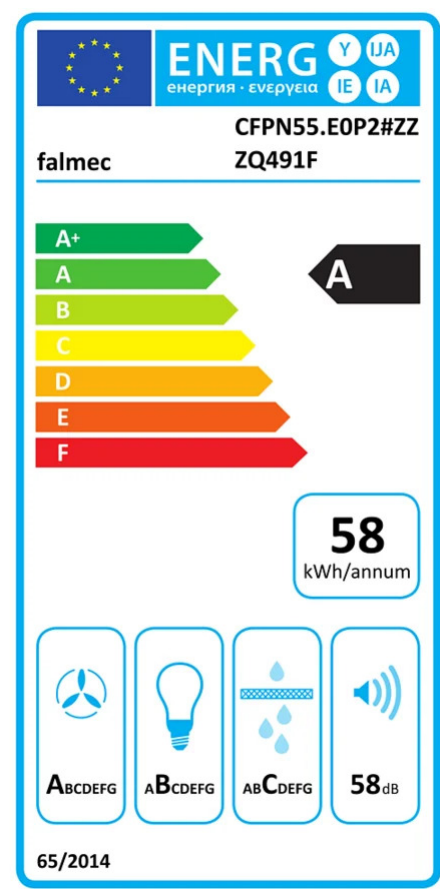

PF		
S		
M	Wall - 55 cm - Satin Black - 800 m3/h	
AEC	57.7	kWh/a
EEC	A	
FDE	29.4	
FDEC	A	
LE	21.6	
LEC	B	
GFE	82	
GFEC	C	
Qmin	295	m³ /h
Qmax	500	m³ /h
Qboost	750	m³ /h
SPEmin	46	dBa
SPEmax	58	dBa
SPEboost	66	dBa
PO	0	W
PS	0.48	W
PI		
F	0.9	
EEL	53.2	
Qbep	430	m³ /h
Pbep	404	Pa
Qboost	750	m³ /h
Wbep	164	W
WL	5.3	W
Emiddle	114	lux
Lwa-SPEmax	58	dBa

PF_Scheda prodotto conforme a 65/2014 S_Vendor name / M_Project identification / AEC_Yearly energy consumption (AEC) hood / EEC_Energy efficiency class / FDE_Fluid dynamic efficiency (FDE) hood / FDEC_Fluid dynamic efficiency class / LE_Light efficiency (LE) hood / LEC_Light efficiency class of luminous efficiency / GFE_Fat filtration efficiency / GFEC_Fat filtration efficiency class / Qmin_Airflow (in m³/h) at minimum power under normal use conditions / Qmax_Airflow (in m³/h) at maximum power under normal use conditions / Qboost_Airflow (in m³/h) at the intensive power / SPEmin_A-weighted sound power of airborne noise emissions at the minimum power under normal use conditions / SPEmax_A-weighted sound power of airborne noise emissions at the maximum power under normal use conditions / SPEboost_A-weighted sound power of airborne noise emissions under intensive or boost use conditions / P0_CPower consumption in off mode (Po) / Ps_CPower consumption in standby mode (Ps).

PI_Additional information in accordance with 66/2014 4 F_Factor of increase over time / EEL_Energy Efficiency Index / Qbep_Airflow speed measured at best efficiency point / Pbep_Air pressure measured at best efficiency point / Qboost_Full airflow / Wbep_Energy input measured at best efficiency point / WL_Nominal power of lighting system / Emiddle_Average illumination of lighting system on cooking surface / Lwa=SPEmax_Loise pressure level at maximum power