

GRUPPO INCASSO PLUS NO-DROP

Version
Plus - Built-in - 90 cm - Inox - 800 m3/h

Designer

Collection
No-Drop

EAN code
8034122367262




The photograph is purely for information
It may not correspond to the selected version.

FEATURES

- Electronic control
- Charcoal filter (optional)
- Remote control (optional)
- Dimmable lighting
- Dynamic Light (2700K - 5600K)
- No-Drop System anti-condensation patented technology
- Liquid collector
- Anti-condensation no-drop filter in technopolymer
- Dialogue system

OPTIONAL ACCESSORIES

- 103050091**
Round charcoal filter Ø170 mm - Type 6
- 105080053**
Remote control



TECHNICAL FEATURES

- Installation type**
Built-in
- Dimensions**
90 cm
- Finishing**
Scotch brite stainless steel (AISI 304)
- Motor**
800 m³/h
- Type of control**
Electronic control
- Speed**
3 + boost
- Lighting**
Led 2x1,8 W - 2700 K / 5600 K
- Minimum distance**
Gas hob: 62 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

- Gross weight**
15.4 kg
- Net weight**
11.9 kg
- Volumes**
0.15 m³
- Packaging size**
Length
915 mm
Height
370 mm
Depth
455 mm

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption**
280 W
- Voltage**
220-240V
- Frequency**
50-60Hz
- ENERGY CLASS**
A

GRUPPO INCASSO PLUS NO-DROP


Version
Plus - Built-in - 90 cm - Inox -
800 m3/h

Designer

Collection
No-Drop

EAN code
8034122367262

ENERGY LABEL

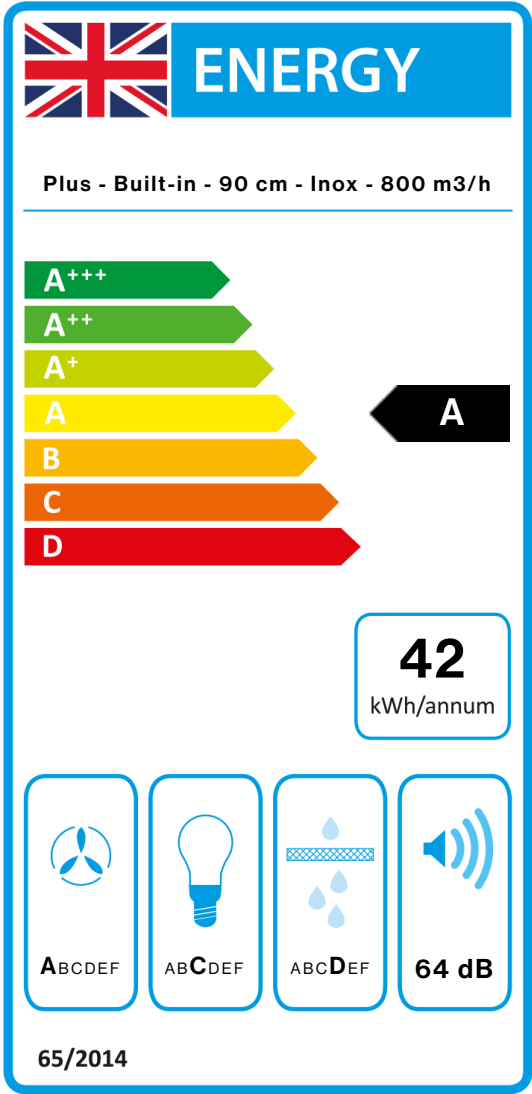

PF		
S	Falmec Spa	
M	Plus - Built-in - 90 cm - Inox - 800 m3/h	
AEC	42,4	kWh/a
EEC	A	
FDE	32,8	
FDEC	A	
LE	18,0	
LEC	C	
GFE	70,0	
GFEC	D	
Qmin	304,0	m³/h
Qmax	575,0	m³/h
Qboost	697,0	m³/h
SPEmin	51	dBa
SPEmax	64	dBa
SPEboost	69	dBa
PO	-	W
PS	0,28	W
PI		
F	0.8	
EEl	46,3	
Qbep	417,0	m³/h
Pbep	379	Pa
Qboost	697,0	m³/h
Wbep	134,0	W
WL	4,50	W
Emiddle	81	lux
Lwa-SPEmax	64	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). PI_Additional information according to 66/2014 F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point /

Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.