

|                               |                                                                                                                                   |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Version                       | Wall - 60 cm - White - 800 m3/h                                                                                                   |
| Design                        | Pio & Tito Toso                                                                                                                   |
| Collection                    | Design                                                                                                                            |
| <b>TECHNICAL FEATURES</b>     |                                                                                                                                   |
| Materials/Finishes            | White opening frontal                                                                                                             |
| Materials/Finishes            | Chrome edge                                                                                                                       |
| Features                      | LED lighting on body and door<br>Opening frontal                                                                                  |
| Control                       | Electronic control                                                                                                                |
| Function                      | Extracting/Filtering                                                                                                              |
| Chimney                       | Possible to duct wall mounted from rear<br>Optional chimney                                                                       |
| Lighting                      | LED 4x1,2 W - 3200 K                                                                                                              |
| Filters                       | Top filter, removable and washable<br>Charcoal filter                                                                             |
| Dimensions                    | 60 cm                                                                                                                             |
| Minimum Electric hob distance | 52 cm                                                                                                                             |
| Minimum Gas hob distance      | 55 cm                                                                                                                             |
| Notes                         | RAL 9016 / Matt White The RAL codes have to be considered indicative since production process and materials may alter the colors. |



Photograph is for information purposes only. May not correspond to the selected version

**CONNECTION AND CONSUMPTION FUNCTIONS**


|                     |                  |
|---------------------|------------------|
| Maximum consumption | 280 W            |
| Voltage/Frequency   | 220-240V 50-60Hz |
| Plug                | Shuko            |

**MOTOR**

|                     |                                  |
|---------------------|----------------------------------|
| Motor               | 800 m³/h                         |
| Maximum capacity    | 750 m³/h I.E.C.61591             |
| Maximum sound level | 58 dB (A)re1pW I.E.C. 60704-2-13 |
| Energy class        | A                                |

**WEIGHTS AND VOLUMES**

|                      |                          |
|----------------------|--------------------------|
| Gross weight         | 20 kg                    |
| Net weight           | 17 kg                    |
| Volume               | 0.2 m3                   |
| Packaging dimensions | L 710 x H 482 x P 595 mm |




**Optional accessories**


| <i><b>Code</b></i> | <i><b>Description</b></i>      |
|--------------------|--------------------------------|
| KCTCN.001#B        | Chimney - White                |
| KACL.1059          | Conveyer for air outlet (Ø150) |

ENGINE SPECIFICATIONS

|                                     |     |     |     |     |
|-------------------------------------|-----|-----|-----|-----|
| Motor speed                         | 1   | 2   | 3   | 4   |
| Noise dB(A) re1pW I.E.C. 60704-2-13 | 46  | 53  | 58  | 66  |
| Capacity                            | 295 | 390 | 500 | 750 |
| Maximum pressure (Pa)               | 390 | 440 | 490 | 510 |
| Motor power (W)                     | 130 | 150 | 178 | 224 |
| Air outlet                          | 150 | 150 | 150 | 150 |

FLOW RATE / PRESSURE

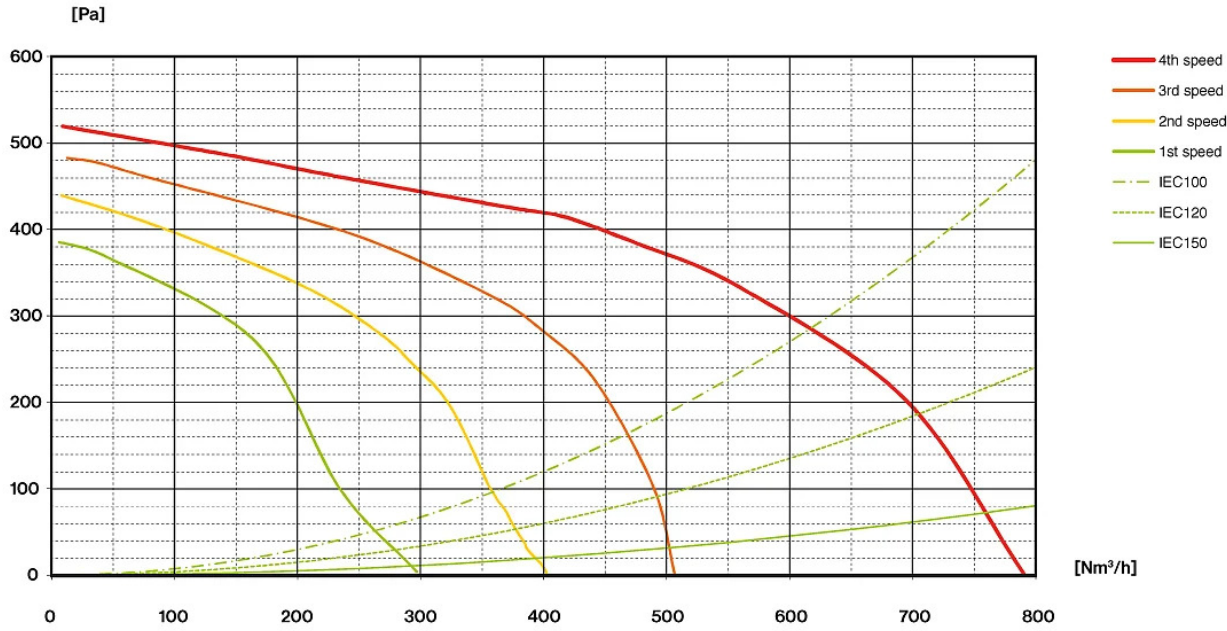

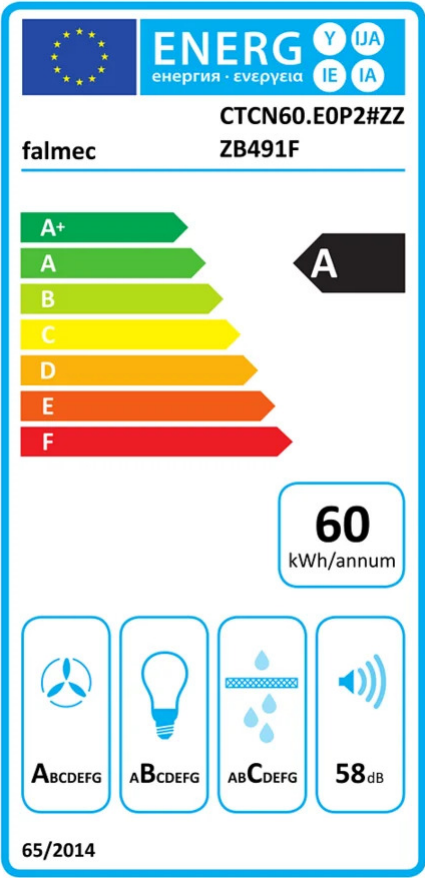

| PF         |                                 |       |
|------------|---------------------------------|-------|
| S          | Pio & Tito Toso                 |       |
| M          | Wall - 60 cm - White - 800 m3/h |       |
| AEC        | 60.2                            | kWh/a |
| EEC        | A                               |       |
| FDE        | 29.8                            |       |
| FDEC       | A                               |       |
| LE         | 24.9                            |       |
| LEC        | B                               |       |
| GFE        | 82                              |       |
| GFEC       | C                               |       |
| Qmin       | 295                             | m³ /h |
| Qmax       | 500                             | m³ /h |
| Qboost     | 750                             | m³ /h |
| SPEmin     | 46                              | dBa   |
| SPEmax     | 58                              | dBa   |
| SPEboost   | 66                              | dBa   |
| PO         | 0                               | W     |
| PS         | 0                               | W     |
| PI         |                                 |       |
| F          | 0                               |       |
| EEL        | 54                              |       |
| Qbep       | 432                             | m³ /h |
| Pbep       | 407                             | Pa    |
| Qboost     | 750                             | m³ /h |
| Wbep       | 164                             | W     |
| WL         | 8.6                             | W     |
| Emiddle    | 214                             | lux   |
| Lwa-SPEmax | 58                              | dBa   |

PF\_Scheda prodotto conforme a 65/2014 S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m³/h) at min speed in normal use / Qmax\_Air flow (in m³/h) at max speed in normal use / Qboost\_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps).

PI\_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.