


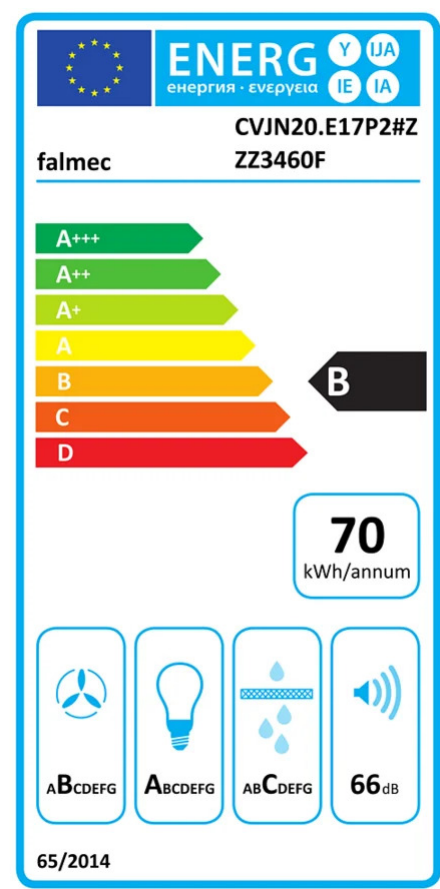

| PF         |                                                 |       |
|------------|-------------------------------------------------|-------|
| S          | Falmec Lab                                      |       |
| M          | Evolution - Built-in - 120 cm - Inox - 600 m3/h |       |
| AEC        | 69.8                                            | kWh/a |
| EEC        | B                                               |       |
| FDE        | 23.2                                            |       |
| FDEC       | B                                               |       |
| LE         | 31.4                                            |       |
| LEC        | A                                               |       |
| GFE        | 80                                              |       |
| GFEC       | C                                               |       |
| Qmin       | 240                                             | m³ /h |
| Qmax       | 580                                             | m³ /h |
| Qboost     | 580                                             | m³ /h |
| SPEmin     | 47                                              | dBa   |
| SPEmax     | 56                                              | dBa   |
| SPEboost   |                                                 |       |
| PO         |                                                 |       |
| PS         | 0                                               | W     |
| PI         |                                                 |       |
| F          | 1                                               |       |
| EEL        | 69                                              |       |
| Qbep       | 360                                             | m³ /h |
| Pbep       | 337                                             | Pa    |
| Qboost     | 580                                             | m³ /h |
| Wbep       | 145                                             | W     |
| WL         | 8.6                                             | W     |
| Emiddle    | 270                                             | lux   |
| Lwa-SPEmax | 65                                              | dBa   |

PF\_Scheda prodotto conforme a 65/2014 S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m³/h) at min speed in normal use / Qmax\_Air flow (in m³/h) at max speed in normal use / Qboost\_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps).

PI\_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.