

VIRGOLA NO-DROP TOUCH

Version
Built-in - 90 cm - Inox - 800 m3/h

Designer

Collection
No-Drop

EAN code
8034122365510


FEATURES

- Slide out glass panel
- Touch control + 24 h function
- Optional Chimney
- Optional glass shelf
- Dynamic Light (2700K - 5600K)
- No-Drop patented anti-condensation system
- Liquid collector
- Anti-condensation no-drop filter in technopolymer
- Carbon.Zeo Microtech filter (optional)

Availability Carbon.Zeo filter
KACL.1039 for hoods produced
from Sept. 2024


OPTIONAL ACCESSORIES

- KACL.1039**
Carbon.Zeo Microtech filter
- KACL.107**
Glass shelf 90 cm
- KCVJN.00#3**
Telescopic chimney h 185 + h 185
- Virgola/Move
- KCVJN.01#3**
Kit Chimney Virgola-Move H120
Stainless Steel



TECHNICAL FEATURES

- Installation type**
Built-in
- Dimensions**
90 cm
- Finishing**
Scotch brite stainless steel
- Motor**
800 m³/h
- Type of control**
Touch control
- Speed**
3 + boost
- Lighting**
Strip Led 5,8 W - 2700 K / 5600 K
- Minimum distance**
Gas hob: 52 cm
Electric hob: 52 cm



The photograph is purely for information
It may not correspond to the selected version.

PACKAGING:WEIGHTS AND
VOLUMES


- Gross weight**
17.7 kg
- Net weight**
13.9 kg
- Volumes**
0.19 m³
- Packaging size**
Length
995 mm
Height
410 mm
Depth
465 mm

CONSUMPTION AND
CONNECTION FEATURES

- Maximum consumption**
280 W
- Voltage**
220-240V
- Frequency**
50-60Hz

MOTOR TECHNICAL SHEET

- Maximum capacity**
661 m³/h
I.E.C. 61591
- Maximum noise level**
71 dB(A)re1pW
I.E.C.60704-2-13
- Maximum pressure (Pa)**
480 Pa
- Max. motor power**
215 W
- ENERGY CLASS**
A



Glass optional shelf

VIRGOLA NO-DROP TOUCH

Version
Built-in - 90 cm - Inox - 800
m3/h

Designer

Collection
No-Drop

EAN code
8034122365510

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	51	62	67	71
Capacity (m3/h) I.E.C.61591	300	420	570	661
Maximum pressure (Pa)	400	440	470	480
Power (W)	150	180	200	215
Air outlet	150	150	150	150

VIRGOLA NO-DROP TOUCH


Version
Built-in - 90 cm - Inox - 800 m3/h

Designer

Collection
No-Drop

EAN code
8034122365510

ENERGY LABEL

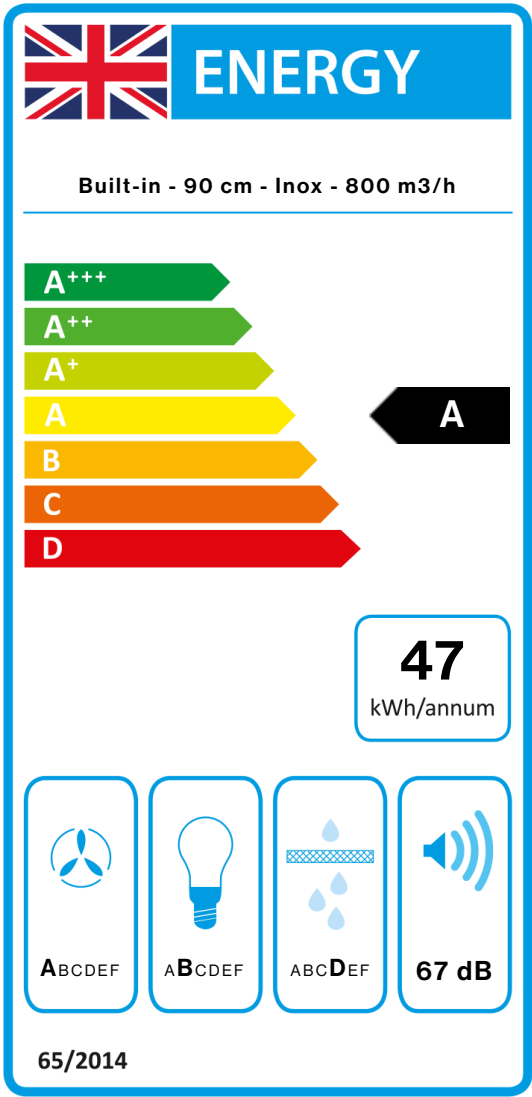

PF		
S	Falmec Spa	
M	Built-in - 90 cm - Inox - 800 m3/h	
AEC	46,9	kWh/a
EEC	A	
FDE	29,8	
FDEC	A	
LE	21,2	
LEC	B	
GFE	70,0	
GFEC	D	
Qmin	300,0	m³/h
Qmax	570,0	m³/h
Qboost	661,0	m³/h
SPEmin	51	dBa
SPEmax	67	dBa
SPEboost	71	dBa
PO	-	W
PS	0,28	W
PI		
F	0.9	
EEl	52,1	
Qbep	389,0	m³/h
Pbep	359	Pa
Qboost	661,0	m³/h
Wbep	130,0	W
WL	5,80	W
Emiddle	123	lux
Lwa-SPEmax	67	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). PI_Additional information according to 66/2014 F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point /

Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.